(57) Abstract



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT) (51) International Patent Classification 6: (11) International Publication Number: WO 99/14512 F16C 33/30 (43) International Publication Date: . 25 March 1999 (25.03.99) (81) Designated States: CN, JP, KR, RU, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, (21) International Application Number: PCT/NL98/00533 (22) International Filing Date: 16 September 1998 (16.09.98) MC, NL, PT, SE). (30) Priority Data: Published 1007046 16 September 1997 (16.09.97) NL With international search report. (71) Applicant (for all designated States except US): SKF INDUSTRIAL TRADING & DEVELOPMENT COMPANY B.V. [NL/NL]; P.O. Box 2350, NL-3430 DT Nieuwegein (NL). (72) Inventors: and (72) Inventors; and
(75) Inventors/Applicants (for US only): HORTON, Stuart, Alexander, Leslie [GB/NL]; Laan van Vollenhove 2907, NL-3706
AR Zeist (NL). VIJGEN, Renier, Olga, Ernst [NL/NL]; Valkenierslaan 5, NL-3451 ZJ Vleuten (NL). CUNDILL, Robin, Thomas [GB/NL]; Karosdrift 14, NL-3436 AR Nieuwegein (NL). SJÖSTRÖM, Hans [SE/SE]; Karlgustavsgatan 21 A S-411 25 Getenburg (SF). gatan 21 A, S-411 25 Gotenburg (SE). (74) Agent: DE BRUIJN, Leendert, C.; Nederlandsch Octrooibu-reau, Scheveningseweg 82, P.O. Box 29720, NL-2502 LS The Hague (NL). (54) Title: COATED ROLLING ELEMENT BEARING 8

A rolling element bearing, comprises an inner ring, an outer ring and rolling elements which are in rolling contact with the raceways of the inner ring and the outer ring. The rolling elements and/or the raceway (2) of at least one of the rings is coated with a metal-mixed diamond-like carbon layer (8).

# FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	. ES · ·	Spain .		LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland		LT	Lithuania	SK	Slovakia ·
AT	Austria '	FR	France	• : .	. LU	Luxembourg	SN-	Senegal
AU .	Australia	GA.	Gabon		LV	Latvia	· S2	Swaziland
AZ	Azerbaijan	GB	United Kingdom		MC -	Monaco	TD	Chad:
BA	· Bosnia and Herzegovina	GE	Georgia		MD	Republic of Moldova	TG '	Togo :
BB	Barbados	GH	Ghana		MG.	Madagascar	TJ	Tajikistan
BE	Belgium	CN	Guinea		MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	. GR	Greece		•	Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary		ML .	Mali	TT	Trinidad and Tobago
· BJ	Benin	IE	Treland		MN '	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel		·MR	Mauritania	, UG	- Uganda
BY	Belarus	-15	Iceland		MW	Malawi	US	United States of America
CA	Canada .	' IT	Italy		MX	Mexico	UZ	Üzbekistan
CF	Central African Republic	JP.	Japan		NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	•	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan		NO	Norway	ZW .	Zimbabwe
CI .	Côte d'Ivoire .	KP	. Democratic People's		NZ	New Zealand		
CM	Cameroon		Republic of Korea		PL	Poland		• •
CN	China ·	KR	Republic of Korea		PT	Portugal		
CU	Cuba ·	KZ	Kazakstan		RO	Romania		
CZ	Czech Republic .	LC	Saint Lucia	•	RU	Russian Federation		
DE	Germany	· LI	Liechtenstein		SD	Sudan		•
DK	Denmark	LK	Sri Lanka .		SE	Sweden		•
EE	Estonia	LR .	Liberia	:	SG	Singapore		

The invention is related to the field of rolling element bearings. Rolling element bearings are applied in various environments. As long as lubrication is guaranteed, their normal design life can generally be obtained without problems.

Under poor or marginal lubrication conditions however, the behaviour of rolling element bearings is less favourable. In such cases, it may prove to be impossible to form a lubricant film, resulting in direct metal-to-metal contact of the rolling elements and the rings, and thus leading to adhesive wear, such as fretting, and premature failure.

Also, rolling element bearings which are exposed to periods of vibratory or oscillatory motions while under static load without rotation of the bearing often show a phenomenon known as "False-Brinelling", which again can limit bearing life.

As a consequence of these phenomena, the service life under poor lubrication conditions is greatly impaired. Attempts have been made to alleviate this problem by applying hard coatings onto the bearing components, e.g. comprising carbide and nitride coatings (e.g. TiN, TiC, CrN), as well as solid lubricants such as molybdenum di-sulphide.

None of these attempts however has yielded a significant improvement.

Although nitride and carbide coatings have high hardness levels and do offer a good abrasive wear resistance and high hardness, their friction coefficients are high. These high friction coefficients in combination with high hardness leads to abrasive wear of the counterface, i.e. of a ring or rolling element.

Furthermore, the high adhesion of TiC, TiN and CrN coatings is only attained with relatively high coating temperatures of the order of 400 °C. Such coatings are widely used for cutting tools where the substrate material is made from highly alloyed high speed steel which retains hardness at temperatures of 500 to 540 °C, due to the phenomenon of secondary hardening. Such coating temperatures would result in excessive softening and dimensional changes with the lower alloyed steels that are commonly used in rolling element bearings.

According to US-A-5108813, normal diamond-like carbon coatings can be applied in sliding bearings. A diamond-like carbon coating is defined as a layer of amorphous hydrogenated carbon consisting of both sp3 and sp2 hybridised carbon.

bonds. While in sliding bearings the adhesion of a diamond-like carbon coating to the substrate is sufficient, in rolling element bearings such coatings flake off as a result of the much higher contact stresses in a rolling element bearing.

The object of the invention is therefore to provide a rolling element bearing which has an increased service life under conditions where lubrication is poor or absent. This object is achieved in that the rolling elements and/or the raceway of at least one of the rings is coated with a metal mixed diamond-like carbon coating.

The metal mixed diamond-like carbon coating according to the invention offers both low friction and high wear resistance, even under the high contact stress levels encountered in rolling element bearings (such stresses can be up to 3 or 4 GPa). The diamond-like carbon coating according to the invention, mixed with carbide forming metal atoms is capable of supporting these high contact stress levels without flaking within itself or from the substrate, when the coating structure is optimized to give high adhesion.

Thus, the coating in question is suitable for application for rolling element bearings operating under dry conditions or where lubrication is poor or even absent.

According to the preferred embodiment, the metal mixed diamond-like-carbon coating is formed on a metallic interlayer of Cr, W, Mo, or Al, which is predeposited onto the substrate surface. There should be a gradual transition of the metallic interlayer into the metal mixed coating. The diamond-like carbon coating, applied to the metallic interlayer, also contains one or more metallic carbide forming elements such as W, Mo or Ti.

The metal mixed diamond-like-carbon part of the coating may be composed of alternating parallel layers of predominantly diamond-like-carbon, but containing some metal carbide, and predominantly metal carbide, but containing some diamond-like-carbon, each of the order of 1 to 50 nanometre thickness.

Alternatively, the metal carbide can be in the form of clusters interspersed throughout a layer of diamond-like-carbon Such layers consists of a matrix of predominantly diamond-like carbon with a dispension of particles of metal carbide. Said particles can have a clustered morphology giving regions (clusters) of metal carbide up to 100 nm in extent. The clusters may be composed of carbides of one or more metals.

The thickness of the metal mixed diamond-like-carbon coating can be up to 10  $\mu$ m. The multi-layer structure of the coating gives rise to reduced residual stresses in the coating and therefore enhanced adhesion compared to conventional single layer diamond-like-carbon coatings with or without a metallic interlayer.

A further important feature of the coating is the possibility to decrease the metallic carbide forming element content towards the surface during the coating process, thereby increasing the diamond like character of the outer layers of the coating. This still results in high adhesion to the substrate but at the same time also allows a significant increase in the surface hardness as the outer layer of the coating is now closer to pure diamond like carbon. In this case, the low friction and increased hardness gives benefits of increased wear resistance, whilst retaining high adhesion necessary for rolling bearing applications.

Also, there can be a gradual increase in graphite content towards the coating surface. This has the benefit of further reducing the friction coefficient. Of course, both a reduction of the metallic carbide forming element, and an increase in the graphite content towards the coating surface can be achieved.

The metal mixed diamond like carbon coating may also contain metallic Ni or possibly Fe as a means of reducing cost of the carbide forming element source material.

Furthermore the metal-mixed diamond-like-carbon coating can be applied at a coating temperature of < 240 °C, with the high adhesion levels necessary for rolling element bearings. In this respect temperature sensitive low alloy bearing steels in the hardened and tempered condition can be coated in such a way that microstructural or phase changes of the substrate material do not occur, with the result that there are no permanent irreversible size changes of the coated bearing components. This allows assembly of rings and/or rolling elements with standard components and avoids the need of matching in order to obtain the desired bearing precision and internal clearance.

In addition the low coating temperature ensures that the substrate hardness and fatigue properties of temperature sensitive low alloy bearing steels are not impaired and that standard static and dynamic capacity ratings for the bearing still apply. Nevertheless, the coating can also be applied to high alloy steels, such as martensitic stainless steels and high speed steels.

WO 99/14512 PCT/NL98/00533

. 4

The invention will be explained further with reference to the examples shown in the figures.

Figure 1 shows a first embodiment of the invention.

Figure 2 shows a second embodiment of the invention.

Figure 1 shows a cross-section to the outer layers of the rolling element or raceway of a ring of a rolling element bearing. The full outer part has been indicated in its entirety by reference No. 1, and has been applied to a substrate 2, e.g. bearing steel.

Said full outer part 1 comprises an intermediate metallic interlayer 3, which
has been applied directly onto the substrate 2, a transition zone 4 which follows the
intermediate metallic interlayer 3, and a metal-mixed diamond-like carbon coating 8.
The transition zone 4 comprises an area wherein a multi-layer transition is obtained,
with alternating metal-carbide layers 5 and metallic layers 6. Subsequently a smooth
transition area 7 is obtained, into the multi-layer structure 8. The transition area 7
provides a smooth transition from metal-carbide to a mixture of metal-carbide and
diamond-like carbon. Said multi-layer structure 8 comprises alternating metal carbide
layers 9 and diamond-like carbon layers 10.

Figure 2 shows a cross-section to an alternative embodiment, also of the outer layers of a rolling element as the raceway of a ring of a rolling element bearing.

The full coating 11 comprises a matrix 12 of predominantly diamond-like carbon, with a dispersion of metal carbide particles 13. Such particles or clusters 13 of metal carbide may have a maximum dimension of 100 nm.

The substrate 2, interlayer 3 and transition zone 4 are similar to the corresponding ones in the embodiment of figure 1.

20

25

#### <u>Claims</u>

- 1. Rolling element bearing, comprising an inner ring, an outer ring and rolling elements which are in rolling contact with the raceways of the inner ring and the outer ring, characterized in that the rolling elements and/or the raceway of at least one of the rings is coated with a metal-mixed diamond-like carbon (1), coating (8-10, 11-13).
- 2. Rolling element bearing according to claim 1, and comprising ancillary components such as a cage, seals, shields and/or a guide ring which are in contact with the rings, rolling elements and/or another of said components, wherein at least one of said ancillary components is coated with a metal-mixed diamond-like-carbon coating (8-10, 11-13)).
  - 3. Rolling element bearing according to claim 1 or 2, wherein the thickness of the metal-mixed diamond-like-carbon coating (8-10, 11-13) is up to  $10 \mu m$ .
  - 4. Rolling element bearing according to claim 1, 2 or 3, wherein the metal-mixed diamond-like-carbon coating (8-10, 11-13) is coated onto a metallic intermediate layer (3).
    - 5. Rolling element bearing according to claim 4, wherein the metal-mixed diamond-like carbon coating (8-10, 11-13) is coated onto a metallic intermediate layer (3) of Cr, W, Mo or Al.
    - 6. Rolling element bearing according to claim 4 or 5, wherein between the metal-mixed diamond-like-carbon coating (8-10, 11-13) and the intermediate metallic layer (3), there is a transition zone (4).
  - 7. Rolling element bearing according to any of the preceding claims, wherein the metal-containing diamond-like-carbon coating (8-10, 11-13) has been applied by coating at a temperature of < 240 °C:

8. Rolling element bearing according to claims 1, 2 and 3, where there is a gradual reduction of the metallic carbide forming element (preferably W, Mo or Ti) content towards the coating surface such that the outer regions of the coating become more diamond like carbon in nature.


5


- Rolling element bearing according to any of the preceding claims, wherein there is a gradual increase in graphite content towards the coating surface.
- 10. Rolling element bearing according to any of the preceding claims, wherein the metal-mixed diamond-like-carbon-coating (8-10, 11-13) contains Ni.
  - 11. Rolling element bearing according to any of the preceding claims, wherein the metal-mixed-diamond-like coating (8) comprises alternating layers (10) of predominantly diamond-like-carbon, and layers (9) of predominantly metal carbide (9).
  - 12. Rolling element bearing according to any of the preceding claims, wherein the metal-mixed-diamond-like coating (8) comprises alternating layers (10) of predominantly diamond-like-carbon, but containing some metal carbide, and layers (9) of predominantly metal carbide (9), but containing some diamond-like-carbon.
  - 13. Rolling element bearing according to any of claims 1-10, wherein metal is in the form of clusters (13) interspersed throughout a matrix (12) of diamond-like-carbon.

25

15

14. Rolling element bearing according to claim 13, wherein the maximum extent of the clusters is 100 nm.

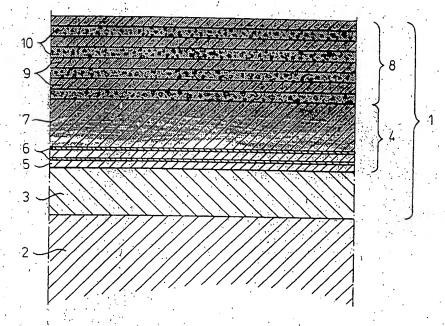

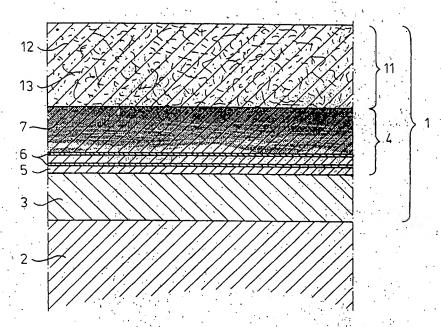

#### INTERNATIONAL SEARCH REPORT

Nernational Application No PCT/NL 98/00533

		PCT/NL 98/00533
a. classii IPC 6	FICATION OF SUBJECT MATTER F16C33/30	
		1
	International Patent Classification (IPC) or to both national classif	loation and IPC
	SEARCHED	
IPC 6.	cumentation searched (classification system followed by classifics F16C	ition symbols)
ocumentat	ion searched other than minimum documentation to, the extent that	such documents are included in the fields searched
lectronic de	ata hase consulted during the internal least according to	
	ata base consulted during the international search (name of data i	sase and, where practical, search terms used)
٠.		· · · · · · · · · · · · · · · · · · ·
	*	
COCUME	ENTE CONCIDEDED TO DE CELEVANT	
	ENTS CONSIDERED TO BE RELEVANT  Citation of document, with indication, where appropriate, of the r	
	or the r	Relevant to claim No.
. '	PATENT ABSTRACTS OF JAPAN	
`	vol. 95, no. 3, 28 April 1995	1,2
	& JP 06 341445 A (SHOJIRO MIYA)	(E)
.	13 December 1994	
·	see abstract	
	US 5 593 234 A (LISTON) 14 Janu	1007
` .	03 3 333 234 A (CISTON) 14 Gallu.	1,3,4,7,
	see column 10, line 18	
	see column 10, line 34 - line 4	0
	UO OF 12602 A (UTC) 11 May 1005	
•	WO 95 12693 A (UTC) 11 May 1995 see page 3, line 20 - line 23	1-5,7
	see page 9, line 18 - line 21	
4	US 5 631 761 A (LEE) 20 May 199	7 1,3,4
	see column 1, line 53 - line 58 see column 2, line 37 - line 60	
	111e 60	
		-/
<u> </u>		
X Funt	her documents are fisted in the continuation of box C.	Patent family members are listed in annex.
Special ca	negories of cited documents :	T* later document published after the international filling date
A" docume	ent defining the general state of the art which is not	or priority date and not in conflict with the application but cited to understand the principle or theory underlying the
E: earlier o	fered to be of particular relevance document but published on or after the international	invention
filing d	tate ant which may throw doubts on priority claim(s) or	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to lead to the considered t
which	is cited to establish the publicationdate of another n or other special reason (as apecified)	involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention
O docum	ent referring to an oral disclosure, use, exhibition or means	cannot be considered to involve an inventive step when the document is combined with one or more other such docu-
P" docume	ent published prior to the international filing date but	ments, such combination being obvious to a person skilled in the art.
later II	han the priority date claimed	"&" document member of the same patent family
	actual completion of theinternational search	Date of mailing of the International search report
Date of the		
	November 1998	11/11/1998
3	mailing address of the ISA	11/11/1998 Authorized officer
3	<u> </u>	

## INTERNATIONAL SEARCH REPORT

nternational Application No PCT/NL 98/00533

C (Continu	tition) DOCUMENTS CONSIDERED TO BE RELEVANT	7 00333		
Category's	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
		THE STATE OF		
A .	US 4 540 636 A (MAC IVER) 10 September 1985 see the whole document	.1		
A	PATENT ABSTRACTS OF JAPAN vol. 17, no. 617 (C-1129), 15 November 1993 & JP 05 186870 A (SEIKO), 27 July 1993 see abstract	1,6,8		
A	EP 0 438 775 A (GENERAL ELECTRIC) 31 July 1991 see claim 5	1,2		
Α .	US 4 960 643 A (LEMELSON) 2 October 1990 see the whole document	1		
Α	US 5 108 813 A (NODA) 28 April 1992 cited in the application see the whole document	.1		

1

#### INTERNATIONAL SEARCH REPORT

Information on patent family members

ternational Application No PCT/NL 98/00533

		tent document in search report		Publication date		Patent family member(s).		Publication date
	US	5593234	A	14-01-1997	JP	9133138	Α	20-05-1997
	WO	9512693.	Α	11-05-1995	US	5482602		09-01-1996
					AU	8086094	Α.	23-05-1995
	US	5631761	Α	20-05-1997	NO	NE		
	US-	4540636	Α	10-09-1985	DE	3447447	' A	04-07-1985
	٠.		٠.		JP	60159168		20-08-1985
					·US	4554208		19-11-1985
					US	4618505	Α΄	.21-10-1986
	EP	438775	Α	31-07-1991	ÜS	4962519	A	09-10-1990
	US	4960643	A	02-10-1990	US	5456406	Α	10-10-1995
				•	· US			04-12-1990
					J. US			17-03-1992
					US			20-08-1991
					US			26-11-1991
		• • •			US			26-10-1993
					US	5132587		21-07-1992
					. US US	5288556 5284394		22-02-1994
•			• .	· · · · · · · · · · · · · · · · · · ·	US			08-02-1994
. '		: " · .			US			26-07-1994
						5360227	. А	01-11-1994
	ÜS	5108813	Α	28-04-1992	JP	2620976	В	18-06-1997
		<i>;</i> .	•		JP			21-02-1991

# This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

### **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:	
☐ BLACK BORDERS	
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES	
☐ FADED TEXT OR DRAWING	
BLURRED OR ILLEGIBLE TEXT OR DRAWING	
SKEWED/SLANTED IMAGES	
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS	
☐ GRAY SCALE DOCUMENTS	
☐ LINES OR MARKS ON ORIGINAL DOCUMENT	
REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY	
Потивр.	

# IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.